


Agilent E8257D PSG Microwave Analog Signal Generator

Data Sheet

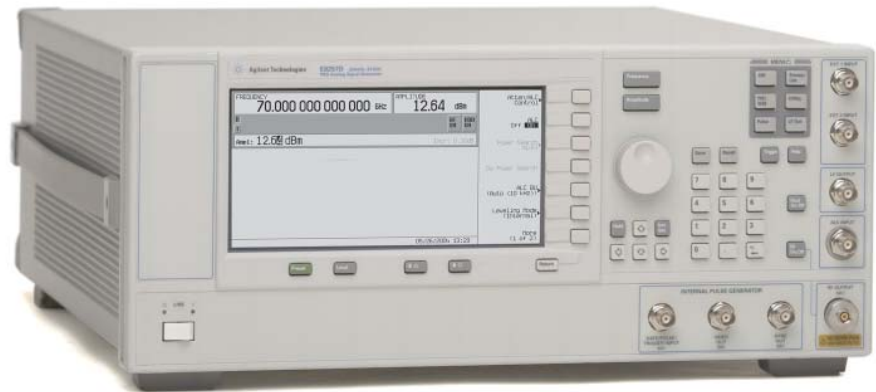

The Agilent E8257D is a fully synthesized signal generator with high output power, low phase noise, and optional ramp sweep capability.

Specifications apply over a 0 to 55 °C range, unless otherwise stated, and apply after a 45 minute warm-up time. Supplemental characteristics, denoted as typical, nominal, or measured, provide additional (non-warranted) information at 25 °C, which may be useful in the application of the product.

Definitions

Specifications (spec): Represents warranted performance for instruments with a current calibration.

Typical (typ): Represents characteristic performance which is non-warranted. Describes performance that will be met by a minimum of 80% of all products.

Nominal (nom): Represents characteristic performance which is non-warranted. Represents the value of a parameter that is most likely to occur; the mean and/or mode of all measurements of a parameter.

Measured: Represents characteristic performance which is non-warranted. Represents the value of a parameter measured on an instrument during design verification.



Agilent Technologies

Table of Contents

Specifications	3
Frequency	3
Step (digital) sweep	4
Ramp (analog) sweep	4
Output	5
Spectral purity	9
Frequency modulation	14
Phase modulation	15
Amplitude modulation	16
Internal modulation inputs	16
External modulation source	17
Pulse modulation	17
Narrow pulse modulation	17
Internal pulse generator	18
Simultaneous modulation	18
Remote programming	19
General specifications	20
Input/Output Descriptions	21
Front panel connectors	21
Rear panel connectors	21
Options, Accessories, and Related Products	23
Web Resources	24
Related Agilent Literature	25

Specifications

Frequency

Range ²		
Option 520	250 kHz to 20 GHz	
Option 521	10 MHz to 20 GHz	
Option 540	250 kHz to 40 GHz	
Option 550	250 kHz to 50 GHz	
Option 567	250 kHz to 67 GHz (operational up to 70 GHz)	
Resolution		
CW	0.001 Hz	
All sweep modes	0.01 Hz ³	
CW switching speed ^{4, 5, 8}		
	< 11 ms (typ)	
	7 ms (nom)	
Phase offset		
	Adjustable in nominal 0.1 ° increments	
Frequency bands		
Band	Frequency range	N ⁶
1	250 kHz to 250 MHz	1/8
2	> 250 to 500 MHz	1/16
3	> 500 MHz to 1 GHz	1/8
4	> 1 to 2 GHz	1/4
5	> 2 to 3.2 GHz	1/2
6	> 3.2 to 10 GHz	1
7	> 10 to 20 GHz	2
8	> 20 to 40 GHz	4
9	> 40 GHz	8
Accuracy		
	± aging rate ± temperature effects	
	± line voltage effects (nom) ± calibration accuracy	
Internal timebase reference oscillator		
Aging rate	Standard ¹ < ±3 × 10 ⁻⁸ /year or < ±2.5 × 10 ⁻¹⁰ /day after 30 days	Option UNX < ±3 × 10 ⁻⁸ /year or < ±2.5 × 10 ⁻¹⁰ /day after 30 days
Temperature effects (typ)	< ±4.5 × 10 ⁻⁹ 0 to 55 °C	< ±4.5 × 10 ⁻⁹ 0 to 55 °C
Line voltage effects (typ)	< ±2 × 10 ⁻¹⁰ for ±10% change	< ±2 × 10 ⁻¹⁰ for ±10% change
External reference frequency		
Lock range	10 MHz only ±1.0 ppm	10 MHz only ±1.0 ppm
Reference output		
Frequency	10 MHz	
Amplitude	> +4 dBm into 50 Ω load (typ)	
External reference input		
Amplitude	5 dBm ±5 dB	
Option UNX	5 dBm ±5 dB ⁷	
Input impedance	50 Ω (nom)	

1. Standard performance applies to units with serial numbers ending with 49280000 or greater. For units with lower serial numbers, refer to the data sheet shipped with the unit or the version of this document dated June 23, 2008.

2. Operational, but unspecified, down to 100 kHz except Option 521. For Option 521, performance is degraded below 500 MHz. Refer to specifications for more detail.

3. In ramp sweep mode (Option 007), resolution is limited with narrow spans and slow sweep speeds. Refer to ramp sweep specifications for more information.

4. Time from GPIB trigger to frequency within 0.1 ppm of final frequency above 250 MHz or within 100 Hz below 250 MHz.

5. Add 12 ms (typical) when switching from greater than 3.2 GHz to less than 3.2 GHz.

6. N is a factor used to help define certain specifications within the document.

7. To optimize phase noise use 5 dBm ± 2 dB.

8. With Option 1EH low band harmonic filters off. With the 1EH filters turned on, add 4 ms.

Step (digital) sweep

Operating modes	<ul style="list-style-type: none"> • Step sweep of frequency or amplitude or both (start to stop) • List sweep of frequency or amplitude or both (arbitrary list)
Sweep range	
Frequency sweep	Within instrument frequency range
Amplitude sweep	Within attenuator hold range (see "Output" section)
Dwell time	1 ms to 60 s
Number of points	2 to 65535 (step sweep) 2 to 1601 per table (list sweep)
Triggering	Auto, external, single, or GPIB
Settling time	
Frequency	< 9 ms (typ) ¹
Amplitude	< 5 ms (typ)

Ramp (analog) sweep (Option 007) ²

Operating modes	<ul style="list-style-type: none"> • Synthesized frequency sweep (start/stop), (center/span), (swept CW) • Power (amplitude) sweep (start/stop) • Manual sweep RPG control between start and stop frequencies • Alternate sweep Alternates successive sweeps between current and stored states 		
Sweep span range	Settable from minimum ³ to full range		
Maximum sweep rate	Start frequency	Maximum sweep rate	Max span for 100 ms sweep
	250 kHz to < 0.5 GHz	25 MHz/ms	2.5 GHz
	0.5 to < 1 GHz	50 MHz/ms	5 GHz
	1 to < 2 GHz	100 MHz/ms	10 GHz
	2 to < 3.2 GHz	200 MHz/ms	20 GHz
	≥ 3.2 GHz	400 MHz/ms	40 GHz
Frequency accuracy	± 0.05% of span ± timebase (at 100 ms sweep time, for sweep spans less than maximum values given above) Accuracy improves proportionally as sweep time increases ⁴		
Sweep time intervals)			
Manual mode settable	10 ms to 200 seconds		
Resolution	1 ms		
Auto mode	Set to minimum value determined by maximum sweep rate and 8757D setting		
Triggering	Auto, external, single, or GPIB		
Markers	10 independent continuously variable frequency markers		
Display	Z-axis intensity or RF amplitude pulse		
Functions	M1 to center, M1/M2 to start/stop, marker delta		
Two-tone (master/slave) measurements ⁵	Two PSG's can synchronously track each other, with independent control of start/stop frequencies		
Network analyzer compatibility	Fully compatible with Agilent 8757D scalar network analyzer Also useable with Agilent 8757A/C/E scalar network analyzers for making basic swept measurements. ⁶		

1. 19 ms (typ) when stepping from greater than 3.2 GHz to less than 3.2 GHz.

2. During ramp sweep operation, AM, FM, phase modulation, and pulse modulation are useable but performance is not guaranteed.

3. Minimum settable sweep span is proportional to carrier frequency and sweep time. Actual sweep span may be slightly different than desired setting for spans less than [0.00004% of carrier frequency or 140 Hz] x [sweep time in seconds]. Actual span will always be displayed correctly.

4. Typical accuracy for sweep times > 100 ms can be calculated from the equation: [(0.005% of span)/(sweep time in seconds)] ± timebase. Accuracy is not specified for sweep times < 100 ms.

5. For master/slave operation use Agilent part #8120-8806 master/slave interface cable.

6. GPIB system interface is not supported with 8757A/C/E, only with 8757D. As a result, some features of 8757A/C/E, such as frequency display, pass-through mode, and alternate sweep, do not function with PSG signal generators.

Output

Minimum settable output power				
Standard		-20 dBm		
With Option 1E1 step attenuator				
Options 520, 521, 532, and 540		-135 dBm		
Options 550 and 567		-110 dBm		
Maximum output power (dBm) ¹		spec. (typical)		
Frequency range ²	Standard	Option 1EU	Option 1E1	Options 1E1 + 1EU
Option 520				
10 to 250 MHz (Filters on)	+12	+12 (+15)	+12	+12 (+15)
> 0.25 to 2 GHz (Filters on)	+14	+14 (+16)	+14	+14 (+16)
250 kHz to 10 MHz	+12	+12 (+15)	+12	+12 (+15)
10 to < 60 MHz	+14	+14 (+17)	+14	+14 (+17)
60 to 250 MHz	+15	+19 (+20)	+15	+19 (+20)
> 0.25 to 3.2 GHz ³	+15	+21 (+23)	+15	+21 (+23)
> 3.2 to 10 GHz	+15	+22 (+23)	+14	+21 (+22)
> 10 to 20 GHz	+15	+21 (+23)	+14	+19 (+21)
Option 521 ⁴				
10 to 250 MHz (Filters on)	+16 (+18)	n/a	+16 (+18)	n/a
> 0.25 to 2 GHz (Filters on)	+18 (+20)	n/a	+18 (+20)	n/a
10 to 250 MHz	+19 (+21)	n/a	+19 (+21)	n/a
> 0.25 to 1 GHz	+24 (+26)	n/a	+24 (+26)	n/a
> 1 to 6 GHz ³	+28 (+30)	n/a	+28 (+30)	n/a
> 6 to 14 GHz	+28 (+30)	n/a	+27 (+28)	n/a
> 14 to 17.5 GHz	+26 (+28)	n/a	+25 (+27)	n/a
> 17.5 to 20 GHz	+24 (+27)	n/a	+23 (+26)	n/a
Options 532 and 540				
10 to 250 MHz (Filters on)	+11	+11 (+14)	+11	+11 (+14)
> 0.25 to 2 GHz (Filters on)	+11	+13 (+15)	+11	+13 (+15)
250 kHz to 10 MHz	+11	+11 (+14)	+11	+11 (+14)
10 to < 60 MHz	+11	+13 (+16)	+11	+13 (+16)
60 to 250 MHz	+11	+18 (+19)	+11	+18 (+19)
> 0.25 to 3.2 GHz ³	+11	+20 (+22)	+11	+20 (+22)
> 3.2 to 17 GHz	+11	+19 (+21)	+10	+17 (+20)
> 17 to 37 GHz	+11	+16 (+19)	+9	+14 (+17)
> 37 to 40 GHz	+11	+14 (+17)	+9	+12 (+16)
Options 550 and 567				
10 to 250 MHz (Filters on)	+5	+10 (+13)	+5	+10 (+13)
> 0.25 to 2 GHz (Filters on)	+5	+12 (+14)	+5	+12 (+14)
250 kHz to 10 MHz	+5	+10 (+13)	+5	+10 (+13)
10 to < 60 MHz	+5	+12 (+15)	+5	+12 (+15)
60 to 250 MHz	+5	+17 (+18)	+5	+17 (+18)
> 0.25 to 3.2 GHz ³	+5	+19 (+21)	+5	+19 (+22)
> 3.2 to 10 GHz	+5	+14 (+21)	+4	+13 (+20)
> 10 to 20 GHz	+5	+14 (+17)	+4	+13 (+16)
> 20 to 30 GHz	+5	+11 (+17)	+3	+9 (+16)
> 30 to 65 GHz	+5	+11 (+14)	+3	+9 (+12)
> 65 to 67 GHz	+5	+10 (+14)	+3	+8 (+12)
> 67 to 70 GHz	(+5)	(+8)	(+3)	(+6)






1. Maximum power specifications are warranted from 15 to 35 °C, and are typical from 0 to 15 °C. Maximum power over the 35 to 55 °C range typically degrades less than 2 dB.

2. With Option 1EH low-pass filters below 2 GHz switched off, unless otherwise specified.

3. With Option 1EH low-pass filters below 2 GHz switched off. With filters on, this specification applies above 2 GHz.

4. Option 521 includes low-pass filters below 2 GHz as standard.

Maximum output power (measured)

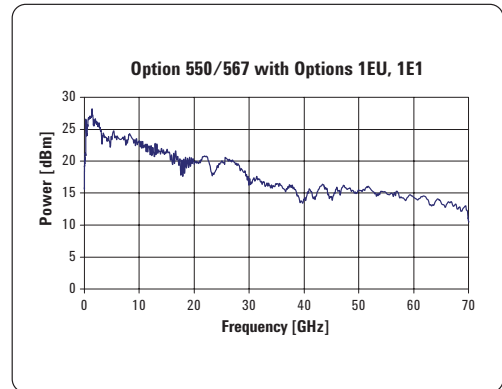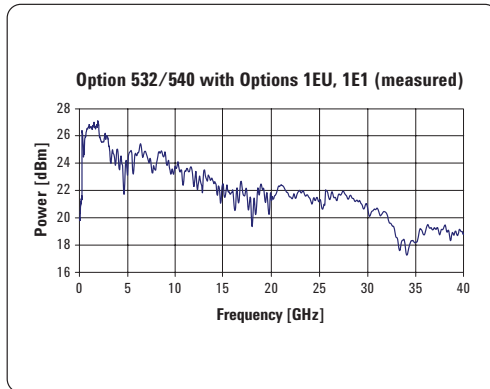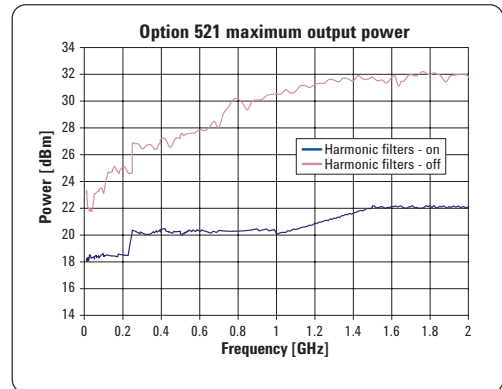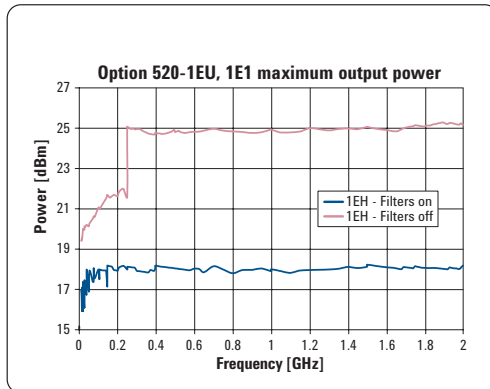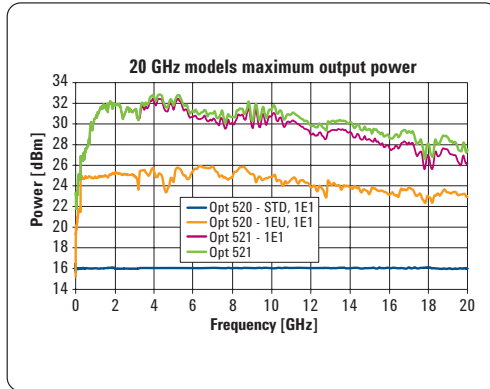

Step attenuator (Option 1E1)¹
 Options 520, 521, 532, and 540 0 dB and 5 dB to 115 dB in 10 dB steps
 With Optimize S/N on² 0 dB to 115 dB in 5 dB steps
 Options 550 and 567 0 dB to 90 dB in 10 dB steps

**Attenuator hold range
 Minimum**

From -20 dBm to maximum specified output power with step attenuator in 0 dB position. Can be offset using Option 1E1 attenuator.






Amplitude switching speed

ALC On: < 6 ms (typ)³
 ALC Off: <10 ms (typ) (not including power search)⁴

1. The step attenuator provides coarse power attenuation to achieve low power levels. Fine power level adjustment is provided by the ALC (Automatic Level Control) within the attenuator hold range.
2. Optimize S/N mode provides improved Signal/Noise performance, and is included with Option 521 and Option 1EU models. Specs in the following sections (such as level accuracy, spectral purity, modulation, etc) are only tested with Optimize S/N mode turned off.
3. To within 0.1 dB of final amplitude within one attenuator range. Does not apply to Option 521 below 500 MHz.
4. To within 0.5 dB of final amplitude within one attenuator range. Also applies to Option 521 below 500 MHz with ALC on. Add 10 to 50 ms when using power search.


Level accuracy ¹ (dB)							
Frequency	< 26 dBm	20 to 16 dBm	16 to 10 dBm	10 to 0 dBm	0 to -10 dBm	-10 to -20 dBm	
Options 520, 532, 540, 550, 567							
250 kHz to 2 GHz ²	±0.8	±0.8 ⁸	±0.6	±0.6	±0.6	±1.2	
> 2 to 20 GHz	±1.0	±0.8	±0.8	±0.8	±0.8	±1.2	
> 20 to 40 GHz	---	±1.0	±1.0	±0.9	±0.9	±1.3	
> 40 to 50 GHz	---	---	---	±1.3	±0.9	±1.2	
> 50 to 67 GHz	---	---	---	±1.5	±1.0	±1.2 (typ)	
Option 521							
10 to < 500 MHz ^{2,3}	±1.9 (typ)	±1.2 (typ)	±1.2 (typ)	±1.1 (typ)	±1.2 (typ)	±1.2 (typ)	
0.5 to 20 GHz	±1.0 ⁷	±0.8	±0.8	±0.8	±0.9	±1.1 ⁴	
Level accuracy with step attenuator (Option 1E1) ⁵ (dB)							
Frequency	> 20 dBm	20 to 16 dBm	16 to 10 dBm	10 to 0 dBm	0 to -10 dBm	-10 to -70 dBm	-70 to -90 dBm
Options 520, 532, 540, 550, 567							
250 kHz to 2 GHz ²	±1.0	±0.8 ⁸	±0.6	±0.6	±0.6	±0.7	±0.8
> 2 to 20 GHz	±1.0	±0.8	±0.8	±0.8	±0.8	±0.9	±1.0
> 20 to 40 GHz	---	±1.0	±1.0	±0.9	±0.9	±1.0	±2.0
> 40 to 50 GHz	---	---	---	±1.3	±0.9	±1.5	±2.5
> 50 to 67 GHz	---	---	---	±1.5	±1.0	±1.5 (typ)	±2.5 (typ)
Option 521							
10 to < 500 MHz ^{2,6}	---	±1.3	±0.8	±0.8	±0.7	±1.0	±1.0
0.5 to 20 GHz	±1.0	±0.8	±0.8	±0.8	±0.8	±1.1	±1.1

Level accuracy (measured)

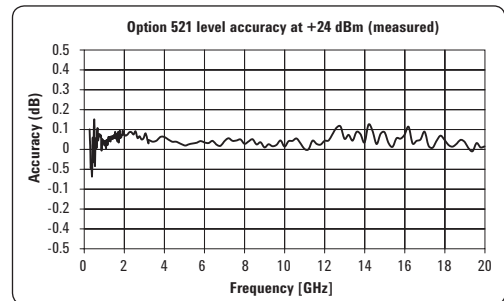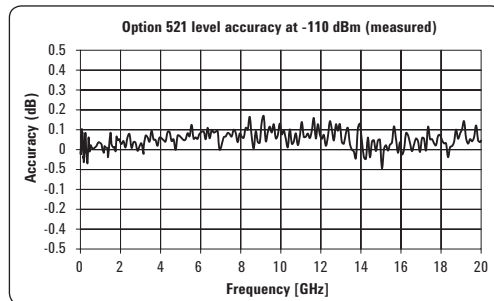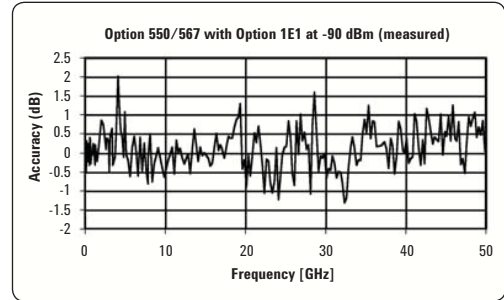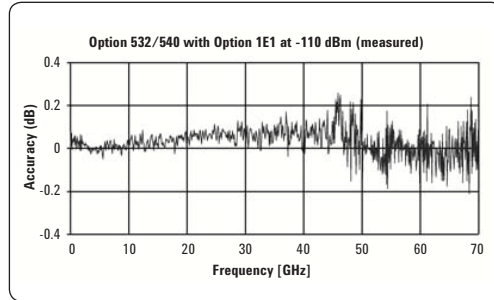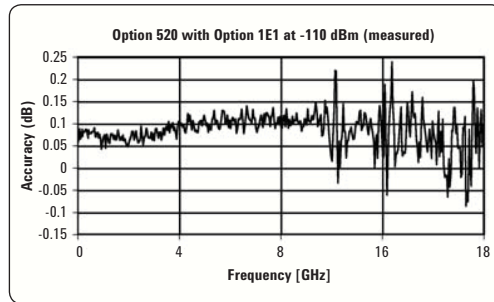

- Specifications apply in CW and list/step sweep modes over the 15 to 35 °C temperature range with the ALC on. Degradation outside this temperature range, for power levels > -10 dBm is typically < 0.3 dB (except < 0.5 dB from 2 to 3.2 GHz and with Option 521 below 500 MHz). In ramp sweep mode (with Option 007), specifications are typical. For instruments with Type-N connectors (Option 1E1), specifications are degraded typically 0.2 dB above 18 GHz.
- When Option UNX Low Phase Noise mode is ON, specifications below 250 MHz apply only when Option 1EH low-pass filters below 2 GHz are on. With Option 1EH low-pass filters below 2 GHz Off, accuracy is typically ±2 dB.
- With Option 521, specifications below 500 MHz are typical, and apply for a 50-ohm load with VSWR less than 1.4:1.
- Typical below -15 dBm.
- Specifications apply in CW and list/step sweep modes over the 15 to 35 °C temperature range, with the ALC on and attenuator hold off (normal operating mode). Degradation outside this temperature range, with attenuator hold on and ALC power levels > -10 dBm, is typically < .3 dB (except < 0.5 dB from 2 to 3.2 GHz and with Option 521 below 500 MHz). In ramp sweep mode (with Option 007), specifications are typical. For instruments with type-N connectors (Option 1E1), specifications are degraded typically 0.2 dB above 18 GHz. Specifications do not apply above the maximum specified power.
- With Option 521, specifications below 500 MHz apply with step attenuator set to 5 dB or higher (requiring Attenuator Hold ON above 8 dBm). With step attenuator set to 0 dB, refer to level accuracy specifications without Option 1E1.
- Typical above +26 dBm.
- Nominal above +16 dBm from 10 MHz to 60 MHz.

Resolution	0.01 dB
Temperature stability	0.02 dB/°C (typ) ¹
User flatness correction	
Number of points	2 to 1601 points/table
Number of tables	Up to 10,000, memory limited
Path loss	Arbitrary, within attenuator range
Entry modes	Remote power meter ² , remote bus, manual (user edit/view)
Output impedance	50 Ω (nom)
SWR (internally leveled)	
Options 520, 532, 540, 550, 567	
250 kHz to 2 GHz	< 1.4:1 (typ)
> 2 GHz to 20 GHz	< 1.6:1 (typ) ³
> 20 GHz to 40 GHz	< 1.8:1 (typ)
> 40 GHz to 67 GHz	< 2.0:1 (typ)
Option 521	
10 to < 500 MHz	< 6:1 (typ) without Option 1E1, or step attenuator set to 0 dB < 1.6:1 (typ) with Option 1E1 step attenuator set ≥ 5 dB
0.5 to 20 GHz	< 1.8:1 (typ)
Leveling modes	Internal leveling, external detector leveling, millimeter source module, ALC off
External detector leveling	
Range	–0.2 mV to –0.5 V (nom) (–36 dBm to +4 dBm using Agilent 33330D/E detector)
Bandwidth	Selectable 0.1 to 100 kHz (nom) (Note: not intended for pulsed operation)
Maximum reverse power	1/2 Watt, 0 VDC ⁴
Adjustable RF output limit	
Function	Protects external devices by limiting maximum RF output. Operates in all leveling modes (internal, external, source module)
Range	User-adjustable from +15 dBm to maximum output power
Accuracy	+15 to +25 dBm ±1 dB (typical) >+25 dBm ±1.5 dB (typical)
Resolution	1 dB
Response Time	30 µsec (measured)
Adjustment	Can be locked to prevent accidental change






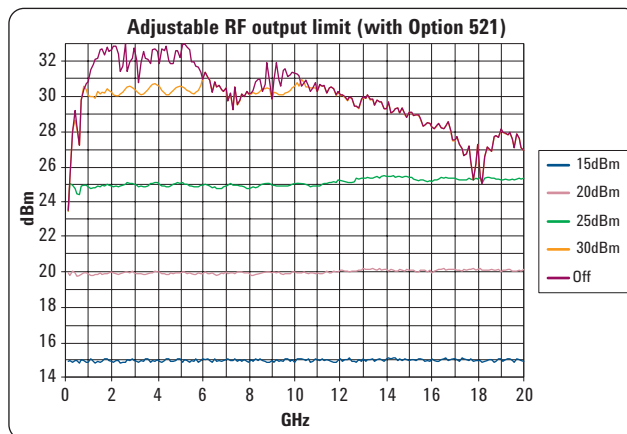


- Options 550 and 567: 0.03dB/°C (typ) above 2 GHz. Option 521: 0.03 dB/°C (typ) below 500 MHz.
- Compatible with Agilent EPM Series (E4418B and E4419B) power meters.
- > 19 GHz with 5 dB step attenuator. The VSWR is typically 1.7:1 from 19 GHz to 20 GHz with the step attenuator set to 0 dB.
- For Option 521, maximum reverse power is 1/2 watt when Option 1E1 step attenuator is set at or above 5 dB. When Option 1E1 step attenuator = 0 dB, or for units without Option 1E1, maximum reverse power is 2 watts above 250 MHz, 1/2 watt below 250 MHz.

Spectral purity

Harmonics ¹	dBc at +10 dBm or maximum specified output power, whichever is lower	
Frequency	Options 520, 532, 540, 550, 567	Option 521
< 10 MHz	-25 dBc (typ < 1 MHz)	---
10 to 50 MHz	-28 dBc	-25 dBc
0.05 to 2 GHz	-30 dBc	-25 dBc
0.01 to 2 GHz with Option 1EH Filters On:	-55 dBc ³	-35 dBc ⁴
2 to 20 GHz	-55 dBc	-35 dBc
20 to 67 GHz	-50 dBc (typ)	---
10 to 250 MHz, Option UNX Low Phase Noise mode:		
With Option 1EH Filters Off:	-8 dBc (typ)	-8 dBc (typ)
2 to 20 GHz	-55 dBc ²	-35 dBc

Harmonics (measured)

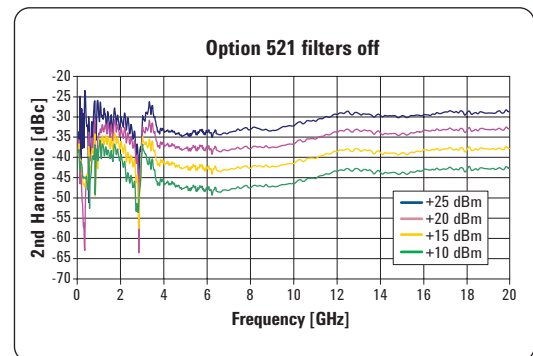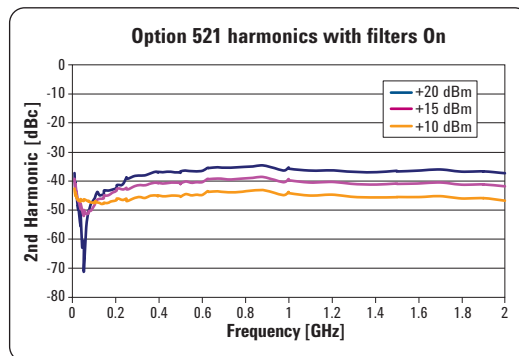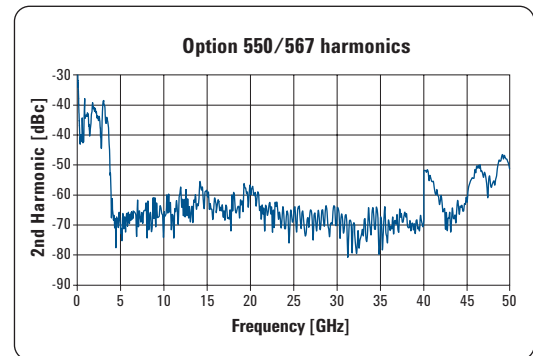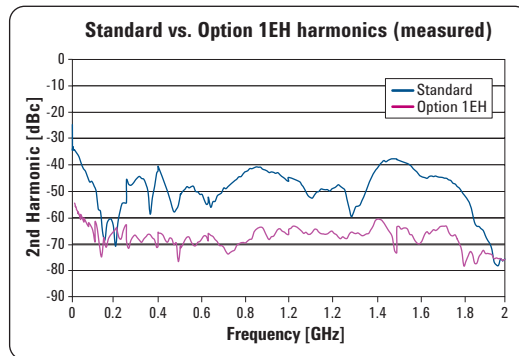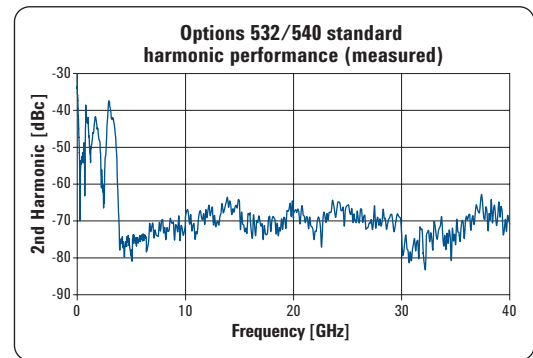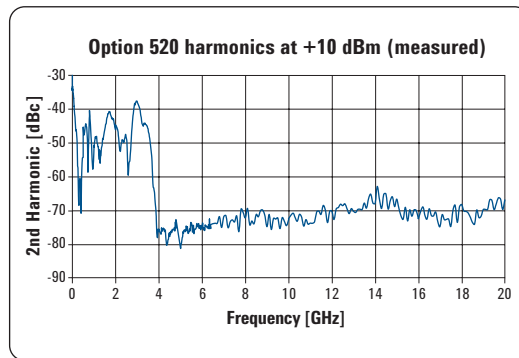

1. Specifications are typical for harmonics beyond specified frequency range (beyond 50 GHz for Option 567). Specifications are with Option 1EH Low-pass Filters below 2 GHz off and Option UNX Low Phase Noise mode off unless noted.
2. -45 dBc below 50 MHz.
3. -45 dBc below 50 MHz. Below 250 MHz in ramp sweep mode (Option 007), Option 1EH filters are always off. Refer to harmonic specification with filters off.
4. Option 521 includes Low-pass Filters below 2 GHz as standard. Below 250 MHz in ramp sweep mode (Option 007), filters are always off. Refer to harmonic specification with filters off.

Sub-harmonics 1	(dBc at +10 dBm or maximum specified output power, whichever is lower)
250 kHz to 10 GHz	None
> 10 GHz to 20 GHz	< -60 dBc
> 20 GHz	< -50 dBc

Non-harmonics 2	(dBc at +10 dBm or maximum specified output power, whichever is lower, for offsets > 3 kHz [> 300 Hz with Option UNX]) ³
------------------------	--

Frequency	Spec	Typical	Line-related
			(≤ 300 Hz) Typical
250 kHz to 250 MHz	-65	-72 ⁴	-55
1 to 250 MHz (Option UNX Low Phase Noise mode)	-80	-88	-55
> 250 MHz to 1 GHz	-80	-88	-55
> 1 to 2 GHz	-74	-82	-55
> 2 to 3.2 GHz	-68	-76	-55
> 3.2 to 10 GHz	-62	-70	-50
> 10 to 20 GHz	-56	-64	-45
> 20 to 40 GHz	-50	-58	-39
> 40 GHz	-44	-52	-37

Residual FM	
(RMS, 50 Hz to 15 kHz bandwidth)	
CW mode	< N x 6 Hz (typ)
Option UNX	< N x 4 Hz (typ)
Ramp sweep mode	< N x 1 kHz (typ)

Broadband noise	
(CW mode at +10 dBm or maximum specified output power, whichever is lower, for offsets > 10 MHz)	
10 MHz to 20 GHz	< -148 dBc/Hz (typ)
10 MHz to 20 GHz (Option 521)	< -142 dBc/Hz (typ)
> 20 to 40 GHz	< -141 dBc/Hz (typ)
> 40 GHz	< -135 dBc/Hz (typ)

Measured RMS jitter 5				
<i>Standard</i>				
Carrier frequency	SONET/SDH data rates	RMS jitter bandwidth	Unit intervals (μ UI)	Time (fs)
155 MHz	155 MB/s	100 Hz to 1.5 MHz	30	190
622 MHz	622 MB/s	1 kHz to 5 MHz	27	43
2.488 GHz	2488 MB/s	5 kHz to 20 MHz	84	34
9.953 GHz	9953 MB/s	10 kHz to 80 MHz	222	22
39.812 GHz	39812 MB/s	40 kHz to 320 MHz	804	21
<i>Option UNX</i>				
Carrier frequency	SONET/SDH data rates	RMS jitter bandwidth	Unit intervals (μ UI)	Time (fs)
155 MHz	155 MB/s	100 Hz to 1.5 MHz	7	47
622 MHz	622 MB/s	1 kHz to 5 MHz	27	43
2.488 GHz	2488 MB/s	5 kHz to 20 MHz	86	35
9.953 GHz	9953 MB/s	10 kHz to 80 MHz	197	20
39.812 GHz	39812 MB/s	40 kHz to 320 MHz	817	21

- Sub-harmonics are defined as Carrier Freq / N). Specifications are typical for sub-harmonics beyond specified frequency range (beyond 50 GHz for Option 567).
- Specifications are typical for spurs beyond specified frequency range (beyond 50 GHz for Option 567). Specifications apply for CW mode, without modulation. In ramp sweep mode (Option 007), performance is typical for offsets > 1 MHz.
- Excluding external mechanical vibration.
- For > 10 kHz offsets.
- Calculated from phase noise performance in CW mode only at +10 dBm. For other frequencies, data rate, or bandwidths, please contact your sales representative. For Option 521 consult the factory.

SSB phase noise (CW) ¹ Frequency	Offset from carrier (dBc/Hz)	
	20 kHz	20 kHz (typical)
250 kHz to 250 MHz ²	-130	-134
> 250 to 500 MHz ²	-134	-138
> 500 MHz to 1 GHz ²	-130	-134
> 1 to 2 GHz ²	-124	-128
> 2 to 3.2 GHz	-120	-124
> 3.2 to 10 GHz	-110	-113
> 10 to 20 GHz	-104	-108
> 20 to 40 GHz	-98	-102
> 40 to 67 GHz	-92	-96

Option UNX: Absolute SSB phase noise (dBc/Hz) (CW) ¹

Frequency	Offset from carrier					
	1 Hz Spec (typ)	10 Hz Spec (typ)	100 Hz Spec (typ)	1 kHz Spec (typ)	10 kHz Spec (typ)	100 kHz Spec (typ)
250 kHz to 250 MHz ²	-58 (-66)	-87 (-94)	-104 (-120)	-121 (-128)	-128 (-132)	-130 (-133)
> 250 to 500 MHz ²	-61 (-72)	-88 (-98)	-108 (-118)	-126 (-132)	-132 (-136)	-136 (-141)
> 500 MHz to 1 GHz ²	-57 (-65)	-84 (-93)	-101 (-111)	-121 (-130)	-130 (-134)	-130 (-135)
> 1 to 2 GHz ²	-51 (-58)	-79 (-86)	-96 (-106)	-115 (-124)	-124 (-129)	-124 (-129)
> 2 to 3.2 GHz	-46 (-54)	-74 (-82)	-92 (-102)	-111 (-120)	-120 (-124)	-120 (-124)
> 3.2 to 10 GHz	-37 (-44)	-65 (-72)	-81 (-92)	-101 (-109)	-110 (-114)	-110 (-115)
> 10 to 20 GHz	-31 (-38)	-59 (-66)	-75 (-87)	-95 (-106)	-104 (-107)	-104 (-109)
> 20 to 40 GHz	-25 (-32)	-53 (-60)	-69 (-79)	-89 (-99)	-98 (-101)	-98 (-103)
> 40 to 67 GHz	-20 (-26)	-47 (-56)	-64 (-73)	-84 (-90)	-92 (-95)	-92 (-97)

Option UNX: Residual SSB phase noise (dBc/Hz) (CW) ¹

Frequency	Offset from carrier					
	1 Hz Spec (typ)	10 Hz Spec (typ)	100 Hz Spec (typ)	1 kHz Spec (typ)	10 kHz Spec (typ)	100 kHz Spec (typ)
250 kHz to 250 MHz ²	(-94)	-100 (-107)	-110 (-118)	-120 (-126)	-128 (-132)	-130 (-133)
> 250 to 500 MHz ²	(-101)	-105 (-112)	-115 (-122)	-124 (-131)	-132 (-136)	-136 (-141)
> 500 MHz to 1 GHz ²	(-94)	-100 (-107)	-110 (-118)	-120 (-126)	-130 (-134)	-130 (-134)
> 1 to 2 GHz ²	(-89)	-96 (-101)	-104 (-112)	-114 (-120)	-124 (-129)	-124 (-129)
> 2 to 3.2 GHz	(-85)	-92 (-97)	-100 (-108)	-110 (-116)	-120 (-124)	-120 (-124)
> 3.2 to 10 GHz	(-74)	(-87)	(-98)	(-106)	(-114)	(-115)







Option UNX Low Phase Noise mode (1 to 250 MHz) ¹

Absolute SSB phase noise (CW) Frequency	Offset from carrier (dBc/Hz at +16 dBm)					
	1 Hz Spec (typ)	10 Hz Spec (typ)	100 Hz Spec (typ)	1 kHz Spec (typ)	10 kHz Spec (typ)	100 kHz Spec (typ)
1 MHz	(-109)	(-120)	(-130)	(-143)	(-150)	(-150)
10 MHz	-90 (-95)	-125 (-130)	-130 (-135)	-143 (-148)	-155 (-158)	-155 (-158)
10 MHz (Option 521)	(-95)	(-115)	(-125)	(-138)	(-145)	(-145)
100 MHz	-70 (-75)	-97 (-102)	-119 (-124)	-130 (-135)	-140 (-145)	-140 (-145)
250 MHz	(-76)	(-104)	(-121)	(-138)	(-142)	(-142)

1. Phase noise specifications are warranted from 15 to 35 °C, excluding external mechanical vibration.





2. Measured at +10 dBm or maximum specified power, whichever is less.

Measured phase noise (data collected with the E5500 and plotted without spurs)

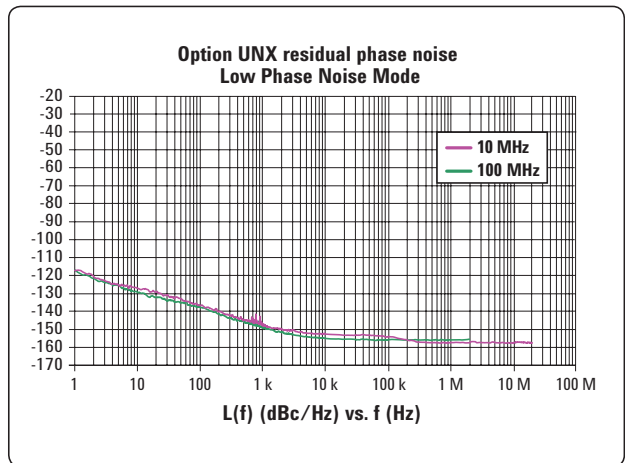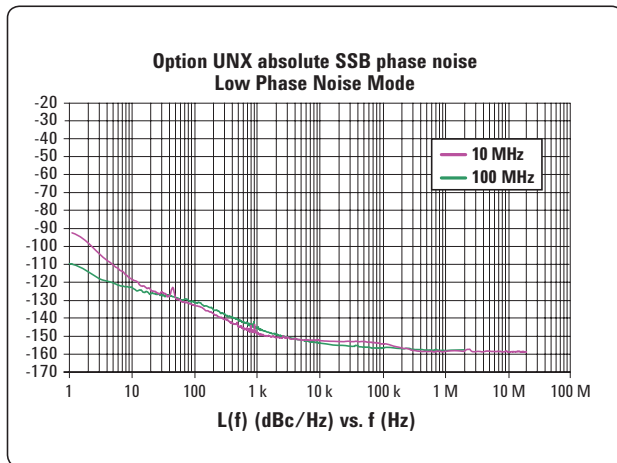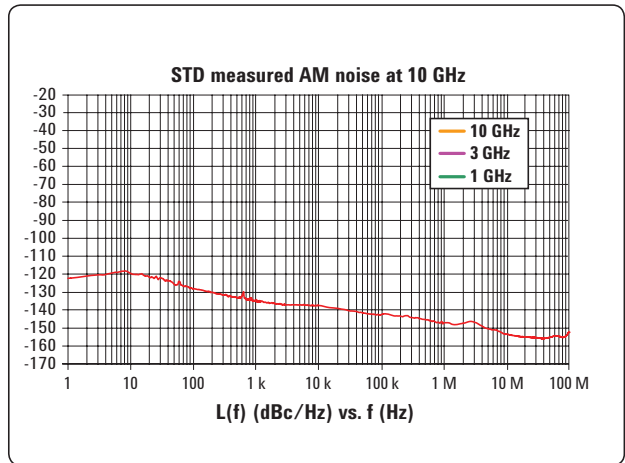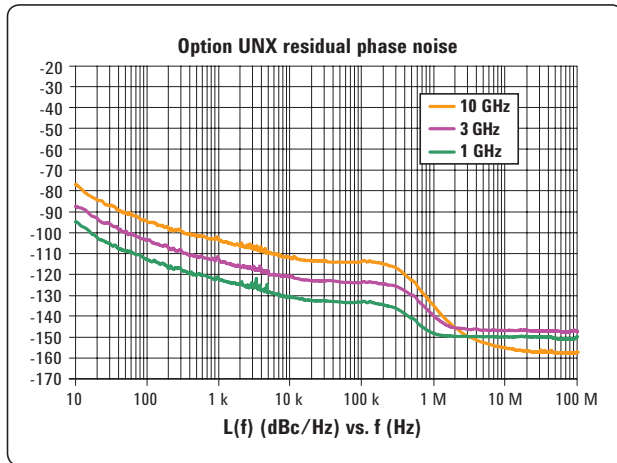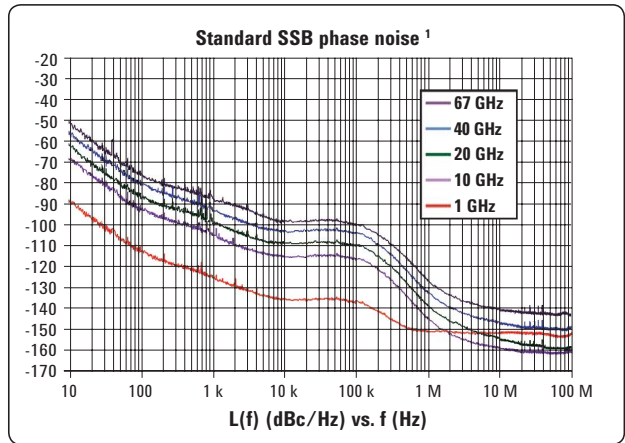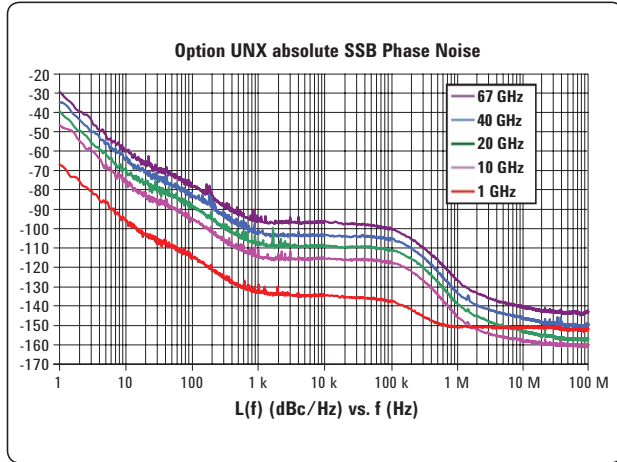

1. Measured standard performance applies to units with serial numbers ending with 48050000 or greater. For units with lower serial numbers, refer to the data sheet shipped with the unit or the version of this document dated November 5, 2007.

Option 521 measured phase noise (data collected with the E5500 and plotted without spurs)

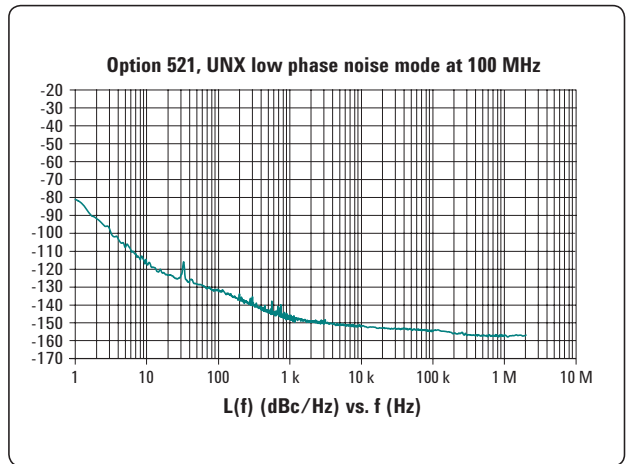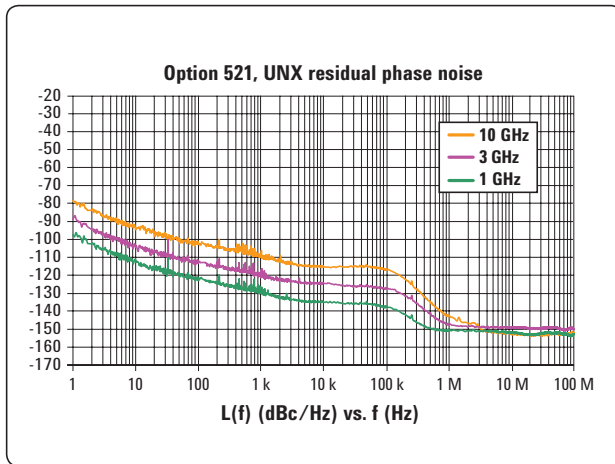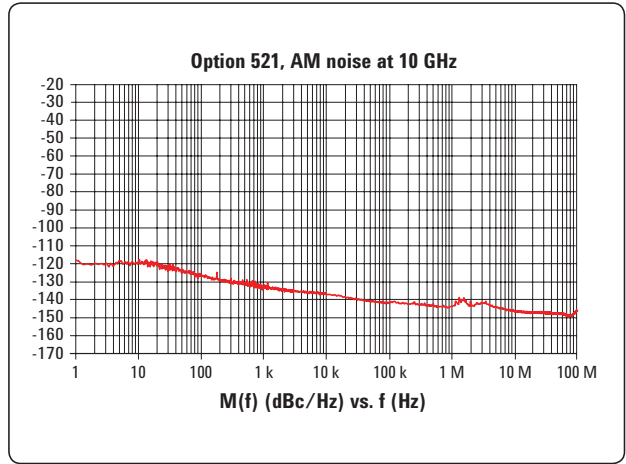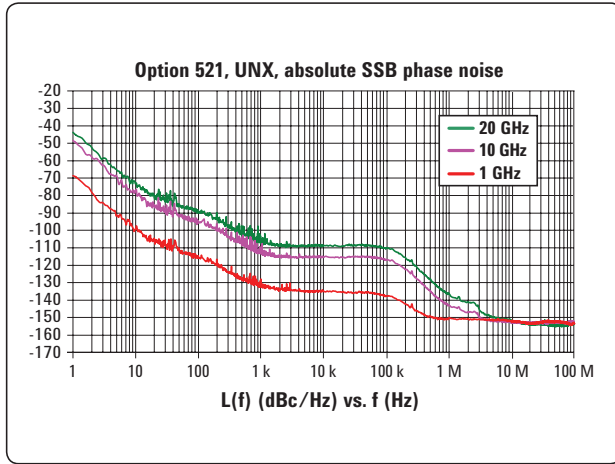

Frequency modulation ¹ (Option UNT)

Maximum deviation ²	Frequency	Maximum deviation
Normal mode	250 kHz to 250 MHz	2 MHz
	> 250 to 500 MHz	1 MHz
	> 500 MHz to 1 GHz	2 MHz
	> 1 GHz to 2 GHz	4 MHz
	> 2 GHz to 3.2 GHz	8 MHz
	> 3.2 GHz to 10 GHz	16 MHz
	> 10 GHz to 20 GHz	32 MHz
	> 20 GHz to 40 GHz	64 MHz
	> 40 GHz to 67 GHz	128 MHz
Option UNX Low Phase Noise Mode		
	Frequency	Max deviation
	> 0.98 to 1.953 MHz	3.906 kHz
	> 1.953 to 3.906 MHz	7.8125 kHz
	> 3.906 to 7.813 MHz	15.625 kHz
	> 7.813 to 15.63 MHz	31.25 kHz
	> 15.63 to 31.25 MHz	62.5 kHz
	> 31.25 to 62.5 MHz	125 kHz
	> 62.5 to 125 MHz	250 kHz
	> 125 to 250 MHz	500 kHz
Resolution	0.1% of deviation or 1 Hz, whichever is greater	
Deviation accuracy	< ± 3.5% of FM deviation + 20 Hz (1 kHz rate, deviations < N x 800 kHz)	
Modulation frequency response ³	(at 100 kHz deviation)	
Path [coupling]	1 dB bandwidth	3 dB bandwidth (typ)
FM path 1 [DC]	DC to 100 kHz	DC to 10 MHz
FM path 2 [DC]	DC to 100 kHz	DC to 1 MHz
FM path 1 [AC]	20 Hz to 100 kHz	5 Hz to 10 MHz
FM path 2 [AC]	20 Hz to 100 kHz	5 Hz to 1 MHz
DC FM ⁴ carrier offset	±0.1% of set deviation + (N x 8 Hz)	
Distortion	< 1% (1 kHz rate, deviations < N x 800 kHz)	
Sensitivity	±1 V _{peak} for indicated deviation	
Paths	FM1 and FM2 are summed internally for composite modulation. Either path may be switched to any one of the modulation sources: Ext1, Ext2, internal1, internal2. The FM2 path is limited to a maximum rate of 1 MHz. The FM2 path must be set to a deviation less than FM1.	

1. Above 50 GHz, FM is useable; however performance is not warranted.

2. Through any combination of path1, path2, or path1 + path2.

3. Specifications apply in CW and list/step sweep modes. During ramp sweep operation (Option 007), 3 dB bandwidth is typically 50 kHz to 10 MHz (FM1 path), and 50 kHz to 1 MHz (FM2 path).

4. At the calibrated deviation and carrier frequency, within 5 °C of ambient temperature at time of user calibration.

Phase modulation ¹ (Option UNT)

Maximum deviation ²	Frequency	Normal BW mode	High BW mode
Normal mode	250 kHz to 250 MHz	20 rad	2 rad
	> 250 to 500 MHz	10 rad	1 rad
	> 500 MHz to 1 GHz	20 rad	2 rad
	> 1 GHz to 2 GHz	40 rad	4 rad
	> 2 GHz to 3.2 GHz	80 rad	8 rad
	> 3.2 GHz to 10 GHz	160 rad	16 rad
	> 10 GHz to 20 GHz	320 rad	32 rad
	> 20 GHz to 40 GHz	640 rad	64 rad
	> 40 GHz to 67 GHz	1280 rad	128 rad
Option UNX Low Phase Noise mode			
	Frequency	Normal BW	High BW
	> 0.98 to 1.953 MHz	0.03906 rad	0.003906 rad
	> 1.953 to 3.906 MHz	0.078125 rad	0.0078125 rad
	> 3.906 to 7.813 MHz	0.15625 rad	0.015625 rad
	> 7.813 to 15.63 MHz	0.3125 rad	0.03125 rad
	> 15.63 to 31.25 MHz	0.625 rad	0.0625 rad
	> 31.25 to 62.5 MHz	1.25 rad	0.125 rad
	> 62.5 to 125 MHz	2.5 rad	0.25 rad
	> 125 to 250 MHz	5 rad	0.5 rad
Resolution	0.1% of set deviation		
Deviation accuracy	< ±5% of deviation + 0.01 radians (1 kHz rate, normal BW mode)		
Modulation frequency response ³			
	Normal BW mode	High BW mode	
Rates (3 dB BW)	DC to 100 kHz	DC to 1 MHz (typ) ⁴	
Distortion	< 1 % (1 kHz rate, Total Harmonic Distortion (THD), dev < N × 80 rad, normal BW mode)		
Sensitivity	±1 V _{peak} for indicated deviation		
Paths	ΦM1 and ΦM2 are summed internally for composite modulation. Either path may be switched to any one of the modulation sources: Ext1, Ext2, internal1, internal2. The ΦM2 path must be set to a deviation less than ΦM1.		

1. Above 50 GHz, phase modulation is useable; however performance is not warranted.

2. Through any combination of path1, path2, or path1 + path2.

3. Specifications apply in CW and list/step sweep modes. During ramp sweep operation (Option 007), 3 dB bandwidth is typically 50 kHz to 1 MHz (high BW mode).

4. Path 1 is useable to 4 MHz for external inputs less than 0.3 V peak; useable to 8 MHz for external inputs less than 0.1 V peak. During ramp sweep operation (Option 007), 3 dB bandwidth is typically 50 kHz to 1 MHz.

Amplitude modulation 1, 2
(part of Option UNT)
(typical)

	Linear mode	Exponential (log) mode (downward modulation only)	
		Option UNT	Option UNT + 1SM ³
Depth			
Maximum			
ALC On	> 90%	> 20 dB	> 20 dB
ALC Off with Power Search ⁴ or ALC On with Deep AM ⁵	> 95%	> 50 dB ⁶	> 60 dB ⁶
Settable	0 to 100%	0 to 40 dB	0 to 40 dB
Sensitivity	0 to 100 %/V	0 to 40 dB/V	0 to 40 dB/V
Resolution	0.1%	0.01 dB	0.01 dB
Depth accuracy (1kHz rate)			
ALC On	± 6% of setting + 1%	± 2% of setting +0.2 dB	±2% of setting +0.2 dB
ALC Off with Power Search ⁴ or ALC On with Deep AM ⁵	---	---	±0.5 dB (< 2 dB depth) ±1 dB (< 10 dB depth) ±2 dB (< 40 dB depth) ±3 dB (< 50 dB depth) ±5 dB (< 60 dB depth)
External input (selectable polarity)			
Sensitivity for indicated depth	1 V peak	-1 V or +1 V	-1 V or +1 V
Maximum allowable	±1 V	±3.5 V ⁷	±3.5 V ⁷
Rates (3 dB bandwidth, 30% depth)			
DC coupled	0 to 100 kHz		
AC coupled	10 Hz to 100 kHz (useable to 1 MHz)		
Distortion⁸ (1 kHz rate, ALC On, linear mode, Total Harmonic Distortion)			
30% AM	< 1.5%		
60% AM	< 2%		
Paths			
AM1 and AM2 are summed internally for composite modulation. Either path may be switched to any one of the modulation sources: Ext1, Ext2, Internal1, Internal2.			
Dual function generators provide two independent signals (internal1 and internal2) for use with AM, FM, Φ M, or LF Out.			
Waveforms Sine, square, positive ramp, negative ramp, triangle, Gaussian noise, uniform noise, swept sine, dual sine ⁹			
Rate range			
Sine	0.5 Hz to 1 MHz		
Square, ramp, triangle	0.5 Hz to 100 kHz		
Resolution	0.5 Hz		
Accuracy	Same as timebase		
LF Out			
Output	Internal1 or internal2. Also provides monitoring of internal1 or internal2 when used for AM, FM, or Φ M		
Amplitude	0 to 3 V _{peak} (nom) into 50 Ω		
Output impedance	50 Ω (nom)		
Swept sine mode			
Operating modes	(frequency, phase continuous) Triggered or continuous sweeps		
Frequency range	1 Hz to 1 MHz		
Sweep rate	0.5 Hz to 100 kHz sweeps/s, equivalent to sweep times 10 μ s to 2 s		
Resolution	0.5 Hz (0.5 sweep/s)		

Internal modulation source
(Option UNT)

1. All AM specifications are typical. For carrier frequencies below 2 MHz or above 50 GHz, AM is useable but not specified. Unless otherwise stated, specifications apply with ALC On, Deep AM Off, and envelope peaks within ALC operating range (-20 dBm to maximum output power, excluding step-attenuator setting.)
2. Below 250 MHz with Option UNX Low Phase Noise mode on, AM is useable but not recommended or specified.
3. Option 1SM Scan modulation is available with Option 520 only, and provides exponential (log) AM with improved accuracy. In this mode, maximum output power is reduced up to 3 dB below 3.2 GHz.
4. ALC Off is used for narrow pulse modulation and/or high AM depths with envelope peaks below ALC operating range. Carrier power level will be accurate after a Power Search is executed. (See pulse modulation section for an explanation of Power Search.)
5. Deep AM with ALC On provides increased AM depths and improved distortion, together with closed-loop internal leveling. This mode must be used with a repetitive AM waveform (frequency > 10 Hz) with peaks > -5 dBm (nominal, excluding step-attenuator setting).
6. Modulation depths greater than 40 dB require an external input greater than ± 1 V, and are not available with the internal modulation source.
7. If 600-ohm input impedance is selected, maximum input voltage is ± 6 V.
8. For Option 521, distortion specifications apply for envelope peaks within the range of -15 dBm to +24 dBm, excluding step-attenuator setting.
9. Internal2 is not available when using swept sine or dual sine modes.

External modulation inputs

(Ext1 & Ext2)
(Option UNT)

Modulation types	AM, FM, and FM
Input impedance	50 Ω or 600 Ω (nom) switched
High/low indicator (100 Hz to 10 MHz BW, ac coupled inputs only)	Activated when input level error exceeds 3% (nom)


Pulse modulation ¹

(Option UNU or UNW)

	Option UNU standard pulse modulation	Option UNW narrow pulse modulation
On/Off ratio	80 dB (typical)	80 dB
Rise/Fall times (Tr, Tf) Options 520, 532, 540, 550, 567		
50 to 400 MHz	10 ns (typical)	15 ns (10 ns typical)
Above 400 MHz	6 ns (typical)	10 ns (6 ns typical)
Option 521		
50 MHz to 1 GHz	25 ns (typical)	30 ns (25 ns typical)
1 to 3.2 GHz	12 ns (typical)	15 ns (12 ns typical)
Above 3.2 GHz	6 ns (typical)	10 ns (6 ns typical)
Minimum pulse width		
ALC On:	1 μ s	1 μ s
ALC Off with power search ² Options 520, 532, 540, 550, 567		
50 to 400 MHz	150 ns	30 ns
Above 400 MHz	150 ns	20 ns
Option 521		
50 MHz: to 1 GHz	150 ns	60 ns
1 to 3.2 GHz	150 ns	30 ns
Above 3.2 GHz	150 ns	20 ns
Repetition frequency		
ALC On	10 Hz to 500 kHz	10 Hz to 500 kHz
ALC Off	dc to 3 MHz	dc to 10 MHz
Level accuracy (relative to CW)		
ALC On	\pm 0.5 dB (0.15 dB typical)	
ALC Off with power search ²		
50 MHz to 3.2 GHz ³	\pm 0.7 dB (typical)	
Above 3.2 GHz	\pm 0.5 dB (typical)	
Width compression (RF width relative to video out)	\pm 5 ns (typical)	
Video feed-through ⁴		
50 to 250 MHz	< 3% (typical)	
> 250 to 400 MHz	< 10% (typical)	
> 0.4 to 3.2 GHz	< 5% (typical)	
Above 3.2 GHz	< 2 mV pk-pk (typ) (<50 mV pk-pk typ for Option 521)	
Video delay (ext input to video)	50 ns (nom)	
RF delay (video to RF output)		
50 to 250 MHz	35 ns (nominal)	
> 0.25 to 3.2 GHz	25 ns (nominal)	
Above 3.2 GHz	30 ns (nominal)	
Pulse overshoot	< 10% (typ) (< 20% typ for Option 521)	
Input level	+1 V = RF On	
Input impedance	50 Ω (nom)	

1. With ALC off, specs apply after the execution of power search. Specifications apply with Atten Hold Off (default mode for instruments with attenuator), or ALC level between -5 and +10 dBm or maximum specific power, whichever is lower. Above 50 GHz or below 50 MHz, pulse modulation is useable; however performance is not warranted. Pulse modulation does not operate if Option UNX Low Phase Noise mode is on.
2. Power Search is a calibration routine that improves level accuracy with ALC off. The instrument microprocessor momentarily closes the ALC loop to find the modulator drive setting necessary to make the quiescent RF level equal to an entered value, then opens the ALC loop while maintaining that modulator drive setting. When executing Power Search, RF power will be present for typically 10 to 50 ms; the step attenuator (Option 1E1) can be set to automatically switch to maximum attenuation to protect sensitive devices. Power search can be configured to operate either automatically or manually at the carrier frequency, or over a user-definable frequency range.
3. \pm 0.8 dB (typical) for Option 550 and Option 567.
4. With Option 1E1 step attenuator in 0 dB position. Above 3.2 GHz, video feed-through decreases with step attenuator setting. Below 3.2 GHz, video feed-through is expressed as a percentage of RF output level.


Measured pulse modulation envelope
 Frequency = 10 GHz, Amplitude = 10 dBm, ALC = Off

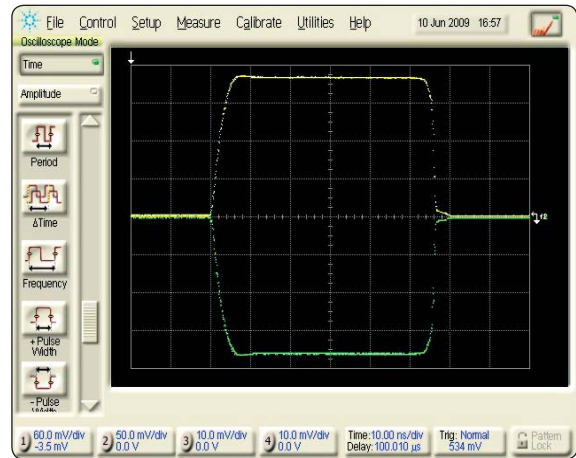

Internal pulse generator
 (Option UNU or UNW)

Modes	Free-run, triggered, triggered with delay, doublet, and gated. Triggered with delay, doublet, and gated require external trigger source.
Period (PRI) (Tp)	70 ns to 42 s (Repetition frequency: 0.024 Hz to 14.28 MHz)
Pulse width (Tw)	10 ns to 42 s
Delay (Td)	Free-run mode: 0 to ±42 s Triggered with delay and doublet modes: 75 ns to 42s with ±10 ns jitter
Resolution	10 ns (width, delay, and PRI)

- Td Video delay (variable)
- Tw Video pulse width (variable)
- Tp Pulse period (variable)
- Tm RF delay
- Trf RF pulse width
- Tf RF pulse fall time
- Tr RF pulse rise time
- Vor Pulse overshoot
- Vf Video feedthrough

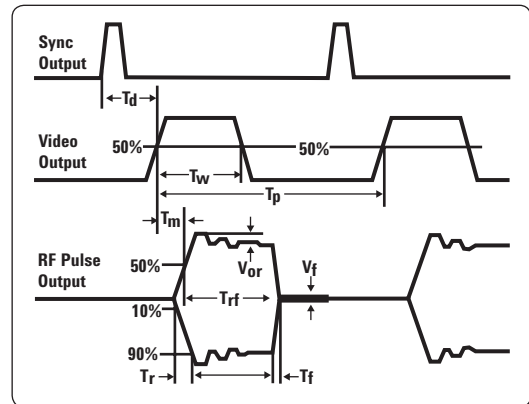

Simultaneous modulation

All modulation types (FM, AM, Φ M, and pulse modulations) may be simultaneously enabled except: FM with Φ M, and linear AM with exponential AM. AM, FM, and Φ M can sum simultaneous inputs from any two sources (Ext1, Ext2, internal1, or internal2). Any given source (Ext1, Ext2, internal1, or internal2) may be routed to only one activated modulation type.

Remote programming

Interfaces	GPIB (IEEE-488.2,1987) with listen and talk, RS-232, and 10BaseT LAN interface.
Control languages	SCPI version 1997.0. Completely code compatible with previous PSG signal generator models: <ul style="list-style-type: none">• E8241A• E8244A• E8251A• E8254A• E8247C• E8257C <p>The E8257D will emulate the applicable commands for the following Agilent signal generators, providing general compatibility with ATE systems:</p> <ul style="list-style-type: none">• 8340-series (8340/41B)• 8360-series (836xxB/L)• 83700-series (837xxB)• 8662A/63A
IEEE-488 functions	SH1, AH1, T6, TE0, L4, LE0, SR1, RL1, PP0, DC1, DT0, C0, E2.
ISO compliant	This family of signal generators is manufactured in an ISO-9001 registered facility in concurrence with Agilent commitment to quality.
Agilent IO Libraries	Agilent's IO Library Suite ships with the E8257D to help you quickly establish an error-free connection between your PC and instruments – regardless of the vendor. It provides robust instrument control and works with the software development environment you choose.

General specifications

Power requirements	100/120 VAC 50/60/400 Hz; or 220/240 VAC 50/60 Hz, (automatically selected); < 250 W typical, 350 W maximum.
Operating temperature range	0 to 55 °C
Storage temperature range ¹	–40 to 70 °C
Altitude	< 4,572 m (15,000 ft.)
Environmental testing	Samples of this product have been tested in accordance with the Agilent Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude, and power line conditions. Test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3. ²
EMC	Meets the conducted and radiated interference and immunity requirements of IEC/EN 61326-1. Meets radiated emission requirements of CISPR Pub 11/1997 Group 1 class A.
Acoustic noise	Normal: 51 dBA (nom) Worst case: 62 dBA (nom) ³
Storage registers	Memory is shared by instrument states and sweep list files. There is 14 MB of flash memory available in the E8257D PSG. Depending on how the memory is used, a maximum of 1000 instrument states can be saved.
Security	Display blanking Memory clearing functions (see Application Note <i>Security of Agilent Signal Generators Issues and Solutions</i> , literature number 5989-1091EN)
Compatibility	Agilent 83550 Series Millimeter Heads and OML millimeter source modules. Agilent 8757D scalar network analyzers. Agilent EPM Series power meters.
Self-test	Internal diagnostic routine tests most modules (including microcircuits) in a preset condition. For each module, if its node voltages are within acceptable limits, then the module “passes” the test.
Weight	< 22 kg (48 lb.) net, < 30 kg (68 lb.) shipping
Dimensions	178 mm H x 426 mm W x 515 mm D (7” H x 16.8” W x 20.3” D in.)
Recommended calibration cycle	24 months

1. Storage below –20 °C instrument states may be lost.


2. As is the case with all signal generation equipment, phase noise specifications are not warranted in a vibrating environment.

3. This is louder than typical Agilent equipment: 60 dBA (nom).

Input/Output Descriptions

Front panel connectors

(All connectors are BNC female unless otherwise noted.)¹

RF output Option 520 and 521	Output impedance 50 Ω (nom) Precision APC-3.5 male, or Type-N with Option 1ED  Caution: Option 521 output power > 1 watt
Options 532, 540 and 550	Precision 2.4 mm male; plus 2.4 – 2.4 mm and 2.4 – 2.9 mm female adapters
Option 567	Precision 1.85 mm male; plus 1.85 – 1.85 mm and 2.4 – 2.9 mm female adapters
ALC input	Used for negative external detector leveling. Nominal input impedance 120 k Ω , damage level ± 15 V.
LF output	Outputs the internally generated LF source. Nominal output impedance 50 Ω .
External input 1	Drives either AM, FM, or Φ M. Nominal input impedance 50 or 600 Ω , damage levels are 5 V_{rms} and 10 V_{peak} .
External input 2	Drives either AM, FM, or Φ M. Nominal input impedance 50 or 600 Ω , damage levels are 5 V_{rms} and 10 V_{peak} .
Pulse/trigger gate input	Accepts input signal for external fast pulse modulation. Also accepts external trigger pulse input for internal pulse modulation. Nominal impedance 50 Ω . Damage levels are 5 V_{rms} and 10 V_{peak} .
Pulse video out	Outputs a signal that follows the RF output in all pulse modes. TTL-level compatible, nominal source impedance 50 Ω .
Pulse sync out	Outputs a synchronizing pulse, nominally 50 ns width, during internal and triggered pulse modulation. TTL-level compatible, nominal source impedance 50 Ω .

Rear panel connectors

(all connectors are BNC female unless otherwise noted.)¹

Auxiliary interface (dual mode)	Used for RS-232 serial communication and for master/slave source synchronization. (9-pin subminiature female connector).
 GPIB	Allows communication with compatible devices
 LAN	Allows 10BaseT LAN communication
10 MHz input	Accepts an external reference (timebase) input (at 1, 2, 2.5, 5, 10 MHz for standard and 10 MHz only for Option UNX) Nominal input impedance 50 Ω Damage levels > +10 dBm
10 MHz output	Outputs internal or external reference signal. Nominal output impedance 50 Ω . Nominal output power +8 dBm.
Sweep output (dual mode)	Supplies a voltage proportional to the RF power or frequency sweep ranging from 0 volts at the start of sweep to +10 volts (nom) at the end of sweep, regardless of sweep width. During CW operation, supplies a voltage proportional to the output frequency, +10 volts (nom) corresponding to the maximum specified frequency. When connected to an Agilent 8757D scalar network analyzer (Option 007), generates a selectable number of equally spaced 1 μ s pulses (nom) across a ramp (analog) sweep. Number of pulses can be set from 101 to 1601 by remote control from the 8757D. Output impedance: < 1 Ω (nom), can drive 2000 Ω .

1. Digital inputs and output are 3.3 V CMOS unless indicated otherwise. Inputs will accept 5 V CMOS, 3 V CMOS, or TTL voltage levels.

Stop sweep In/Out	Open-collector, TTL-compatible input/output. In ramp sweep operation, provides low level (nominally 0 V) during sweep retrace and bandcross intervals, and high level during the forward portion of the sweep. Sweep will stop when grounded externally, sweep will resume when allowed to go high.
Trigger output (dual mode)	Outputs a TTL signal. High at start of dwell, or when waiting for point trigger; low when dwell is over or point trigger is received. In ramp sweep mode, provides 1601 equally-spaced 1us pulses (nom) across a ramp sweep. When using LF Out, provides 2 us pulse at start of LF sweep.
Trigger input	Accepts 3.3V CMOS signal for triggering point-to-point in manual sweep mode, or to trigger start of LF sweep. Damage levels $\geq +10$ V or ≤ -4 V.
Source module interface	Provides power and leveling connections to the millimeter source modules.
Source settled	Provides an output trigger that indicates when the signal generator has settled to a new frequency or power level. High indicates source not settled, Low indicates source settled.
Z-axis Blank/Markers	During ramp sweep, supplies +5 V (nom) level during retrace and bandswitch intervals. Supplies -5 V (nom) level when the RF frequency is at a marker frequency.
10 MHz EFC	(Option UNX only) Accepts an external DC voltage, ranging from -5 V to +5 V, for electronic frequency control (EFC) of the internal 10 MHz reference oscillator. This voltage inversely tunes the oscillator about its center frequency approximately -0.07 ppm/V. The nominal input impedance is greater than 1 M Ω .
1 GHz Out	(Option UNX only) Low noise 1 GHz reference output signal, approximately +5 dBm (nom).
Removable flash memory drive	Accepts 8 GB compact flash memory card for optional non-volatile memory (Option 008 only). All user information (Save/Recall settings, flatness files, presets, etc) is stored on removable memory card.

Options, Accessories, and Related Products

Model/option	Description
E8257D-520	Frequency range from 250 kHz to 20 GHz
E8257D-521	Ultrahigh output power, frequency range from 10 MHz to 20 GHz
E8257D-532	Frequency range from 250 kHz to 31.8 GHz
E8257D-540	Frequency range from 250 kHz to 40 GHz
E8257D-550	Frequency range from 250 kHz to 50 GHz
E8257D-567	Frequency range from 250 kHz to 67 GHz
E8257D-007	Analog ramp sweep
E8257D-008	8 GB removable flash memory
E8257D-UNX	Ultra low phase noise
E8257D-UNT	AM, FM, phase modulation, and LF output
E8257D-UNU	Pulse modulation
E8257D-UNW ¹	Narrow pulse modulation
E8257D-1E1	Step attenuator
E8257D-1ED	Type-N (f) RF output connector (Option 520 and 521 only)
E8257D-1EH	Improved harmonics below 2 GHz (low-pass filters standard with Option 521)
E8257D-1EM	Moves all front panel connectors to the rear panel
E8257D-1EU	High output power (standard with Option 521)
E8257D-1CN	Front handle kit
E8257D-1CM	Rackmount flange kit
E8257D-1CP	Rackmount flange and front handle kit
E8257D-1SM ²	Scan modulation (Option 520 only)
E8257D-C09	Move all front panel connectors to the rear panel except for the RF output connector
E8257D-H1S	1 GHz external frequency reference input and output
E8257D-HCC	Connections for phase coherency > 250 MHz
E8257D-H30 ¹	Internal mixer for up conversion capability in the 20, 31.8, and 40 GHz models
E8257D-H60 ¹	Internal mixer for up conversion capability in the 50 and 67 GHz models
E8257D-H65 ¹	Internal mixer and doubler for up conversion capability in the 20 GHz, 31.8 GHz, and 40 GHz models
E8257D-UK6	Commercial calibration certificate and test data
E8257D-CD1	CD-ROM containing the English documentation set
E8257D-ABA	Printed copy of the English documentation set
E8257D-0BW	Printed copy of the assembly-level service guide
8120-8806	Master/slave interface cable
9211-2656	Transit case
9211-7481	Transit case with wheels
E8257DS15 ³	OML Inc. Millimeter source module, 50 GHz to 75 GHz at +8 dBm
E8257DS12 ³	OML Inc. Millimeter source module, 60 GHz to 90 GHz at +6 dBm
E8257DS10 ³	OML Inc. Millimeter source module, 75 GHz to 110 GHz at +5 dBm
E8257DS08 ³	OML Inc. Millimeter source module, 90 GHz to 140 GHz at –2 dBm
E8257DS06 ³	OML Inc. Millimeter source module, 110 GHz to 170 GHz at –6 dBm
E8257DS05 ³	OML Inc. Millimeter source module, 140 GHz to 220 GHz at –12 dBm
E8257DS03 ³	OML Inc. Millimeter source module, 220 GHz to 325 GHz at –25 dBm

1. Must be ordered with Option 1E1.

2. Must be ordered with Option UNT and Option 520.

3. Millimeter source module a product of Oleson Microwave Labs, Inc. and must be ordered with Option 1EU.

Web Resources

For additional information, visit:

www.agilent.com/find/psg

For more information about renting, leasing or financing Agilent's latest technology, visit:

www.agilent.com/find/buy/alternatives

For more accessory information, visit:

www.agilent.com/find/accessories

For additional description of Agilent's IO Libraries Suite features and installation requirements, please go to:

www.agilent.com/find/iosuite/database

Related Agilent Literature

Agilent PSG Microwave Signal Generators
Brochure, Literature number 5989-1324EN

E8257D PSG Microwave Analog Signal Generators
Configuration Guide, Literature number 5989-1325EN

E8267D PSG Microwave Vector Signal Generator
Data Sheet, Literature number 5989-0697EN
Configuration Guide, Literature number 5989-1326EN

E8663D PSG RF Analog Signal Generator
Data Sheet, Literature number 5990-4136EN
Configuration Guide, Literature number 5990-4137EN

Millimeter Wave Source Modules from OML, Inc. for the Agilent PSG Signal Generators
Technical Overview, Literature number 5989-2923EN

Security of Agilent Signal Generators
Issues and Solutions, Literature number 5989-1091EN



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements. For information regarding self maintenance of this product, please contact your Agilent office.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance, onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

www.agilent.com/find/removealldoubt

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

Europe & Middle East

Austria	01 36027 71571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	07031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201

Other European Countries:

www.agilent.com/find/contactus

Revised: March 24, 2009

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2009
Printed in USA, August 6, 2009
5989-0698EN

